

L3025X

Panel 295X295mm 25W 2125lm ADJUSTABLE COLOR
Panel 295X295mm 25W 2125lm COLOR REGULABLE



FOR17 Rev.3



CCT 3000K 4500K 6000K	Lm 1750 2125 1750	Lm/W 70 85 70	CRI >80
	14001 ISO	9001 ISO	CE
		RoHS	


Physical and electrical Data / Datos Físicos y Eléctricos

Total consumption / Consumo total (W)	25
Output current / Intensidad de salida @230V AC(A)	0.114
Input voltage / Tensión de entrada (V/Hz)	100-277/50-60
Power factor / Factor de potencia	0.95
Regulation / Regulación	EXILIS Programming (SMART COLOR)
Working temperature / Temperatura de trabajo (°C)	-20....+40
Dimensions / Dimensiones (mm)	295X295X9
Weight / Peso (g)	700
Finish / Acabado	Translucent / Translúcido
Degree of protection / Grado de protección	IP20


Light Data / Datos Lumínicos

Temperature range / Rango de temperatura (K)	3000-6000K
Lux 1 meter / Lux 1 metro (4500K)	660
Angle / Ángulo 50%	110°

Light spectrum / Espectro Lumínico

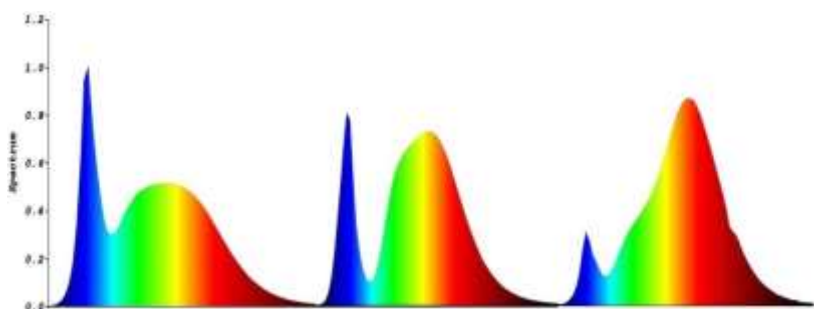

Dimensions / Dimensiones

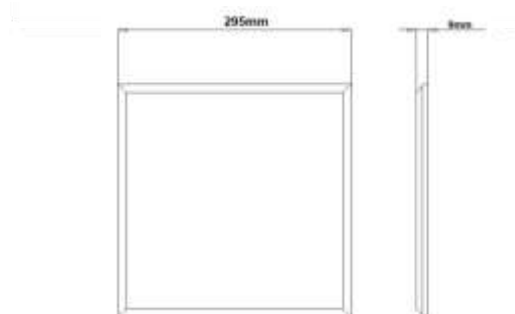

Connection diagram / Diagrama de conexión

