

LK5940X7

Kit 2x1 40+40W 5850lm ADJUSTABLE COLOR

Kit 2x1 40+40W 5850lm COLOR AJUSTABLE




CCT 2700K 4400K 6500K	Lm 4200 4800 4400	Lm/W 105 120 110	CRI >80
	14001 ISO	9001 ISO	


Light Data / Datos Lumínicos

Total consumption/Consumo total (W)	40+40
Output current / Intensidad de salida @230V AC(A)	0.41
Input voltage / Tensión de entrada (V/Hz)	100-277/50-60
Power factor / Factor de potencia	0.95
Regulation / Regulación EXILIS Programming/Programación(SMART COLOR)	
Working temperature / Temperatura de trabajo (°C)	-10....+40
Dimensions / Dimensiones (mm/panel)	2x(595x595x9)
Weight / Peso (g/ panel)	2780
Finish / Acabado	Translucent / Translúcido
Degree of protection / Grado de protección	IP20

Dimensions / Dimensiones

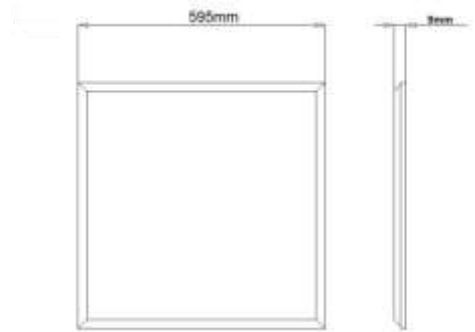

Connection diagram / Diagrama de conexión

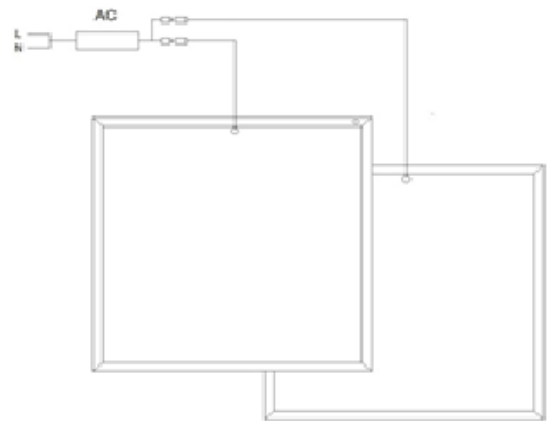

Light Data / Datos Lumínicos

Temperature range / Rango de temperatura (K)	2700-6500K
Lux 1 meter / Lux 1 metro (4000K / panel)	2060
Angle / Ángulo 50%	110°

Light spectrum / Espectro Lumínico

