

TB1540X

TBAR 1500mm 40W 4400lm ADJUSTABLE COLOR
TBAR 1500mm 40W 4400lm COLOR REGULABLE



FOR17 Rev.3



CCT 3000K 4500K 6500K	Lm 4200 4400 4200	Lm/W 105 110 105	CRI >80
	14001 ISO	9001 ISO	CE


Physical and electrical Data / Datos Físicos y Eléctricos

Total consumption/Consumo Total (W)	40
Output current / Intensidad de salida @230V AC (A)	0,182
Input voltage / Tensión de entrada (V/Hz)	100-277/50-60
Power factor / Factor de potencia	0.95
Regulation / Regulación	EXILIS Programming (SMART COLOR)
Working temperature / Temperatura de trabajo (°C)	-20....+40
Dimensions / Dimensiones (mm)	1500x115x75
Weight / Peso (g)	2200
Finish / Acabado	Translucent / Translúcido
Degree of protection / Grado de protección	IP20

Light Data / Datos Lumínicos

Temperature range / Rango de temperatura (K)	3000-6500K
Lux 1 meter / Lux 1 metro (4500K)	1480
Angle / Ángulo 50%	110°

Light spectrum / Espectro Lumínico

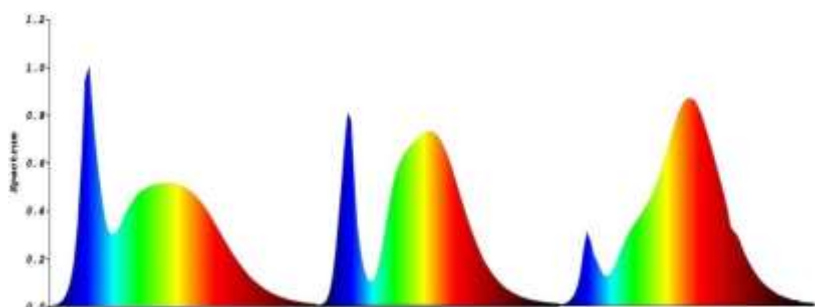

Dimensions / Dimensiones



Connection diagram / Diagrama de conexión

