

I045E10Z

Power supply/*Fuente de alimentación*



50W
máx

90-305V
AC

Dimable

IP20

9001
ISO

14001
ISO

Physical data and others/*Datos Físicos y otros*

Dimensions/ <i>Dimensiones</i>	189x38,5x32mm
Weight/ <i>Peso</i> (g)	172
Dimming level/ <i>Nivel de dimado</i>	32
Working temperature/ <i>Temperatura</i>	-30...50 °C
Degree of protection/ <i>Grado de protección</i>	IP20
Compatible constant light/ <i> luz constante</i>	YES/ SI
Compatible adjustable color/ <i> Cambio Color</i>	YES/ SI

Input data/*Datos Entrada*

Voltage range/ <i>Rango de voltaje</i> (V)	90...305
Voltage rate/ <i>Ratio de voltaje</i> (V)	100-277
Frecuency/ <i>Frecuencia</i>	50/60 Hz
Power factor/ <i>Factor de potencia</i>	>0,95
efficacy/ <i>Eficacia</i>	>90%
Max input current/ <i>Corriente de entrada</i>	<8A(230 VAC)
Input power/ <i>Potencia de entrada</i>	18-50W

Output data/*Datos Salida*

Voltage range <i>/Rango de voltaje</i> (V)	28-48V DC
Current adjustment range/ <i>ajuste de corriente</i>	50 mA...1,6A
Max output power/ <i>Potencia de salida</i>	45 W

Protection/*Proteccion*


Overheating/ <i>Sobrecalentamiento</i>	110 °C
Open circuit/short circuit <i>corta/ ca</i>	YES/ SI
Overvoltage/ <i>Sobretensiones</i>	4 Kv


Connection/*Comunicación*


Modem PLC	NO
Modem BT	YES/ SI
Transfer rate/ <i>Tasa de transferencia</i>	100 bps
Max distance between nodes/ <i>Distancia nodos</i>	500
Repeater mode/ <i>Modo repetidor</i>	NO
TX/RX informer/ <i>Informador TX/RX</i>	YES/ SI-YES/ SI




FOR17 Rev.2

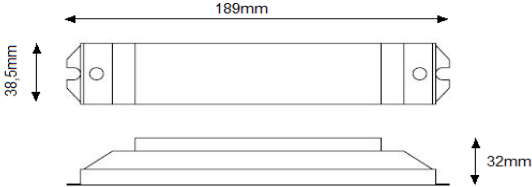

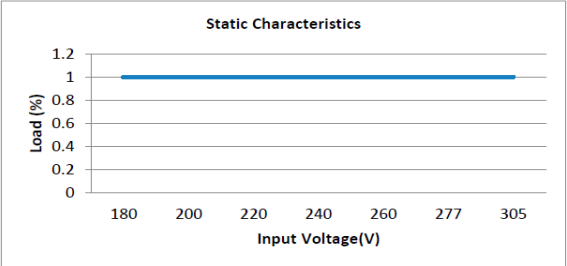

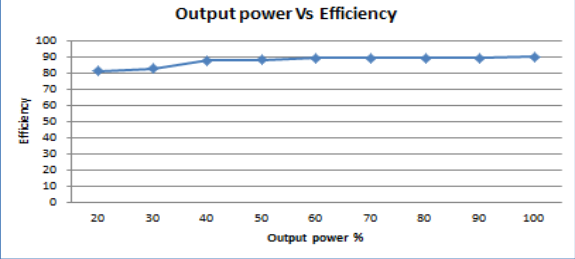

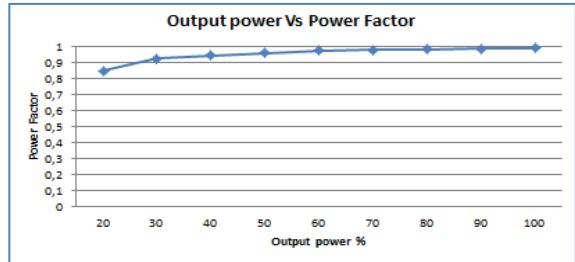

Regulations/*Normativas*

LVD	EMC	RoHS
2066/95/EC	204/108/EC	2011/65/EU
EN 61347-1:2008+ A1:2011+A2:2013	EN 55015:2013 EN 61000-3-2:2014	IEC 62321:2008
EN 61347-2-13:2006 EN 62493:2010	EN 61000-3-3:2013 EN 61000-4-2,3,4,5,6,11 EN 61547:2009	