


Control panel/Cuadro de mando

Telegestión



9001
ISO

14001
ISO



Network analyzer/Analizador de redes

Dimensions/Dimensiones	70x58x88mm
Weight/Peso	250gr
Input voltage/Voltage entrada (V)	Trif 50-240V/Mono 30-265V
Frequency/Frecuencia	50Hz (47-63Hz)
Supply/Alimentación (V AC)	115-230

Input-output module/Modulo Entrada-Salida

Dimensions/Dimensiones	70x58x88mm
Weight/Peso	100gr

Modem GPRS

Dimensions/Dimensiones	70x58x88mm
Weight/Peso	150gr
Input voltage/Voltaje entrada (V)	100-240V AC 50/60Hz
4 Bands/Bandas GSM	850/900/1800/1900 Mhz
Battery/Batería	until 1h



Filter/Filtro PLC

Dimensions/Dimensiones	90x35x70 (2 elements of rail DIN)
------------------------	-----------------------------------

Modem PLC-Repetidor (SPLCSB)

Dimensions/Dimensiones	88x58x90mm
Weight/Peso	390gr
Max. input current/Max. corriente de entrada (A)	10
Degree of Protection/Grado de proteccion	IP20
Voltage range/Rango de voltage (V)	100-265
Power consumption/Consumo (W)	3,5
Overvoltage/Proteccion contra sobrevoltaje	10KV

Connection/Comunicaciones	Puerto RS232/3 phases, neutral
---------------------------	--------------------------------

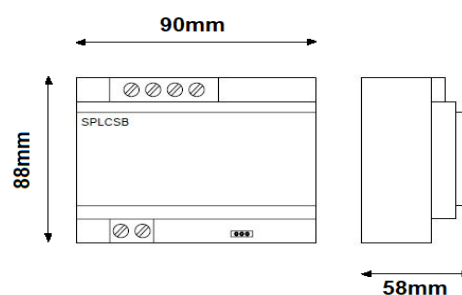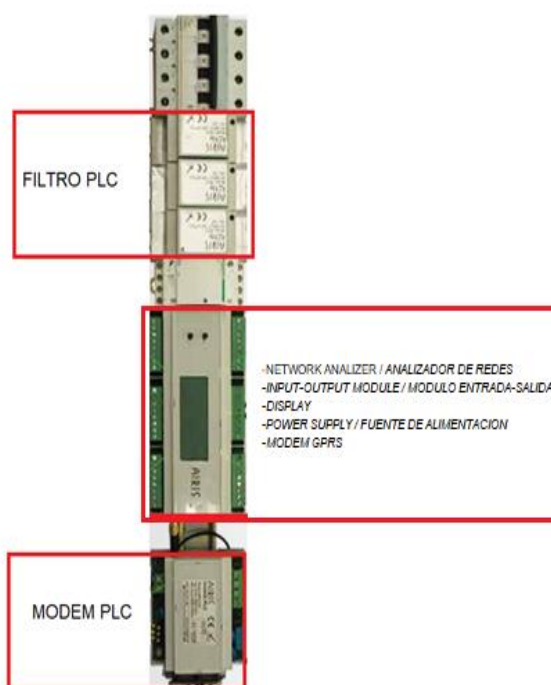

Electrical values and average light (+/- 10%). Non-contractual data, valid except for typographical error or omission.